

TWYER 6" (155mm) STORM RESISTANT HIDDEN MULLION LOUVER MODEL TWY631



TEST TO STANDARD ANSI/AMCA 500-L-2012 WIND DRIVEN RAIN TEST

DESIGN DATA:

To maintain a **CLASS A (99%) effectiveness** rating with a 50mph (23.3 m/s) wind speed and a rainfall rate of 8 in/hr (203mm/hr)

- Maximum intake core velocity 4.0m/s
- Maximum intake free area velocity 6.49m/s
- Intake pressure drop 120pa
- Intake capacity 4.0m³s

*louver tested with 1m² core area, mill finish and no screen

Free Area: 51.3%

SUGGESTED SPECIFICATIONS:

1. GENERAL: Furnish and install where indicated on the drawings TWYER 6" (155mm) STORM RESISTANT HIDDEN MULLION TYPE LOUVER MODEL TWY631 as manufactured by TWYER LIMITED.

Complete details shall be submitted to the architect for approval prior to fabrication.

2. MATERIAL: Frames and blades to be fabricated from 6063-T5 aluminum alloy.
Blades

to be minimum 1.52mm thick extrusions and frames to be a minimum 2.03mm thick.

Louver


to be mechanically fastened using stainless steel or aluminum fasteners. Louvers to be a drainable system with architectural line "front appearance". Louvers to be installed in accordance with the manufacturer's recommended procedures to ensure complete water integrity

performance of louver system. Louvers to be furnished with 0.05" (12.7mm) mesh screen if


necessary, secured within extruded aluminum frame.

3. STRUCTURAL DESIGN: Structural supports shall be designed and furnished by the louver manufacturer to carry a wind load of not less than ____ kPa (Note: If this paragraph is omitted or if the design wind load is not specified, the louvers will be manufactured in self-supporting units up to a maximum of 1500 mm wide by 2400mm high. Any additional structural supports required to adequately secure these unit within the opening shall be the responsibility of others.

4. FINISH: Louvers shall be finished in PVDF, with minimum thickness as per paint manufacturer's recommendation. The coating shall meet or exceed all requirements of AAMA specification 2605 "Voluntary Specification for High Performance Organic Coatings on Architectural Extrusions and Panels". The Louver manufacturer shall supply an industry standard 5 year limited warranty upon the date of material shipment. The finish will be applied to the exterior elements only.

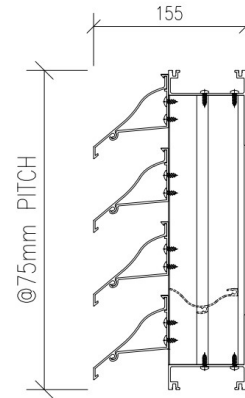

SECTION VIEW

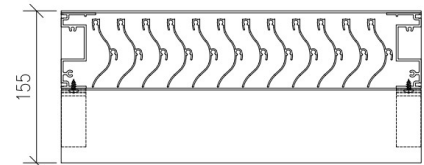

PLAN VIEW

TWY631

Discharge Coefficient
Cd = 0.26 (Class 3)

WIND DRIVEN RAIN PERFORMANCE:

29.1 mph (13 m/s) & 3" (75 mm) rain per hour

Core Ventilation Rate (m/s):	0.0	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0
Rating effectiveness:	A	A	A	A	A	A	A	A	A
Effectiveness Rating:	A=1 to 0.99		B=0.989 to 0.95		C=0.949 to 0.80		D= Below 0.80		

50 mph (23.3 m/s) & 8" (203 mm) rain per hour

Core Ventilation Rate (m/s):	0.0	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0
Rating effectiveness:	A	A	A	A	A	A	A	A	A
Effectiveness Rating:	A=1 to 0.99		B=0.989 to 0.95		C=0.949 to 0.80		D= Below 0.80		